




QUAD CONFIGURATION FOR WELL WATER, CATCHMENT, OR CISTERN PARALLEL SYSTEMS IN SERIES RATED TO 150GPM: Two Views

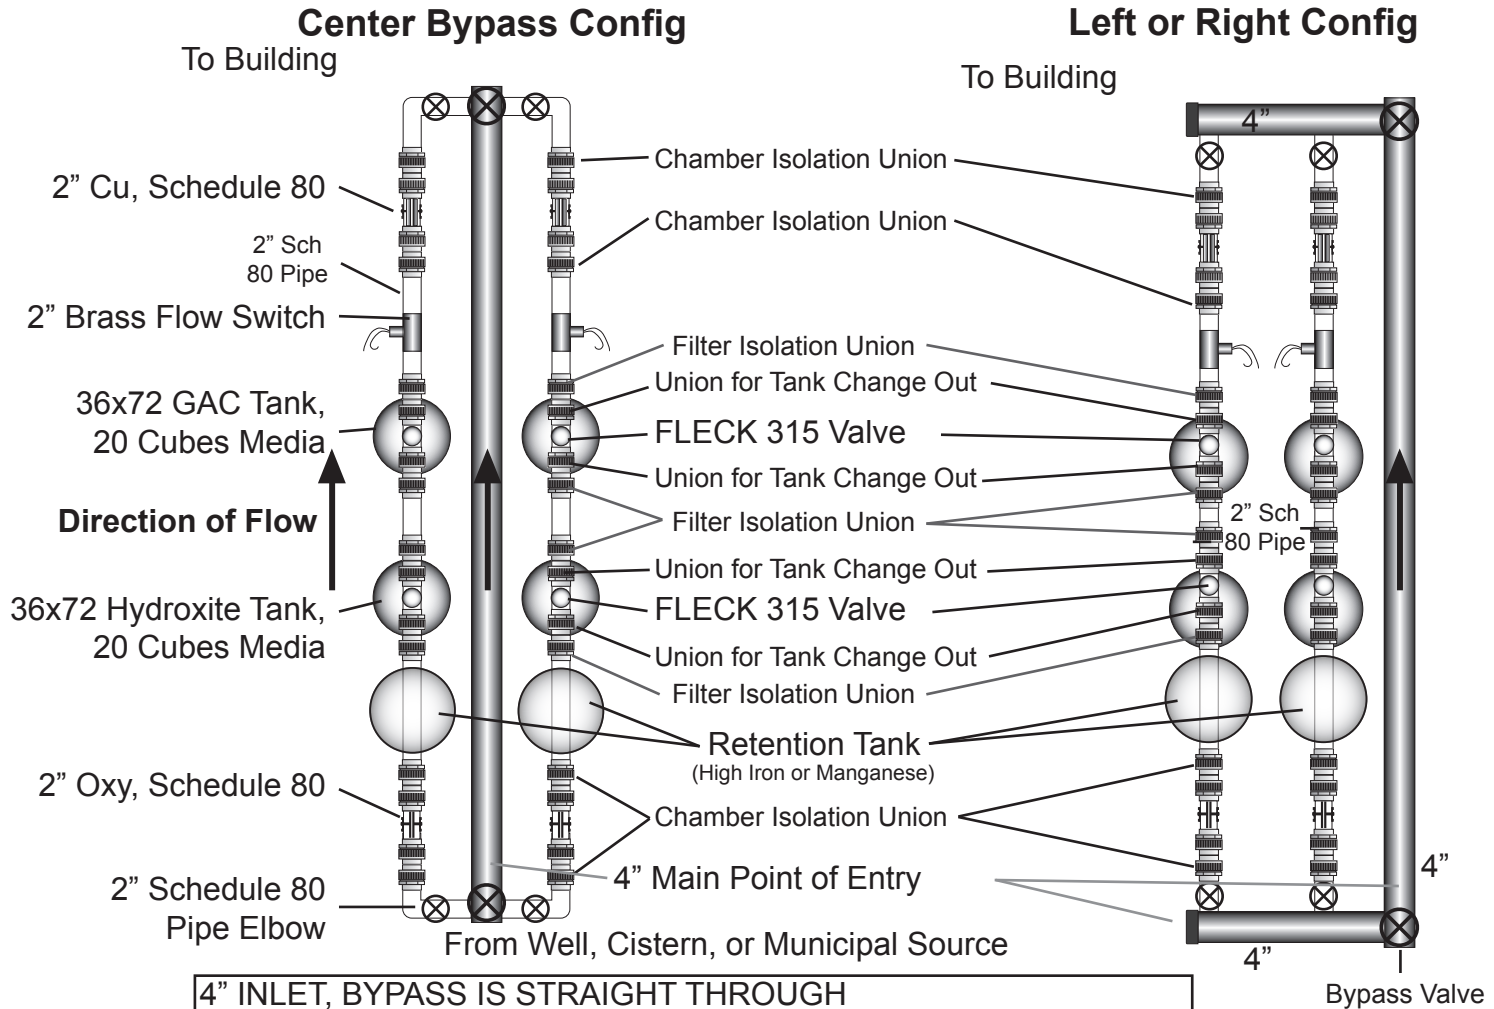

4" INLET, BYPASS IS STRAIGHT THROUGH
 Two 2" LINES IN PARALLEL, 80 or 120 GALLON RETENTION TANK
 Two 36x72 GAC AND HYDROXITE TANKS, 1 SET IN EACH SERIES
 Two FLECK 315 VALVES
 GATE VALVES ISOLATE Cu/Oxy CHAMBERS
 TWO YEAR MEDIA CHANGE OUT, VALVE REBUILD KIT
 ONE YEAR COPPER CHANGE OUT
 MONTHLY Cu/Oxy CHAMBER CLEAN
 DAILY COPPER TEST .1ppm TO .25ppm
 VALVE TIMERS CONFIRMED
 ALL TANKS BACKWASH AT DIFFERENT TIMES
 GAC FLOW CONTROL 65 DFLC
 HYDROXITE FLOW CONTROL 80 DFLC
 220v / 50Hz ECOsmarte CONTROLLERS
 FLECK 315 VALVES, REBUILD KIT 3RD YEAR

NOTE: TOP VIEW
 Plumbing Enters
 bottom of
 retention tank,
 out of top to filter
 isolation union.

LOGISTICS:

SHIPS 4 PALLETS; 1250lbs ON 3 PALLETS, 900lbs ON 4TH PALLET

ECOsmarte Planet Friendly, Inc. • 1600 E. 78th Street • Richfield, MN 55423 • Phone: (612) 866-1200 • Fax: (612) 866-0152