




DUAL CONFIGURATION FOR MUNICIPAL PARALLEL SYSTEMS IN SERIES RATED TO 65GPM

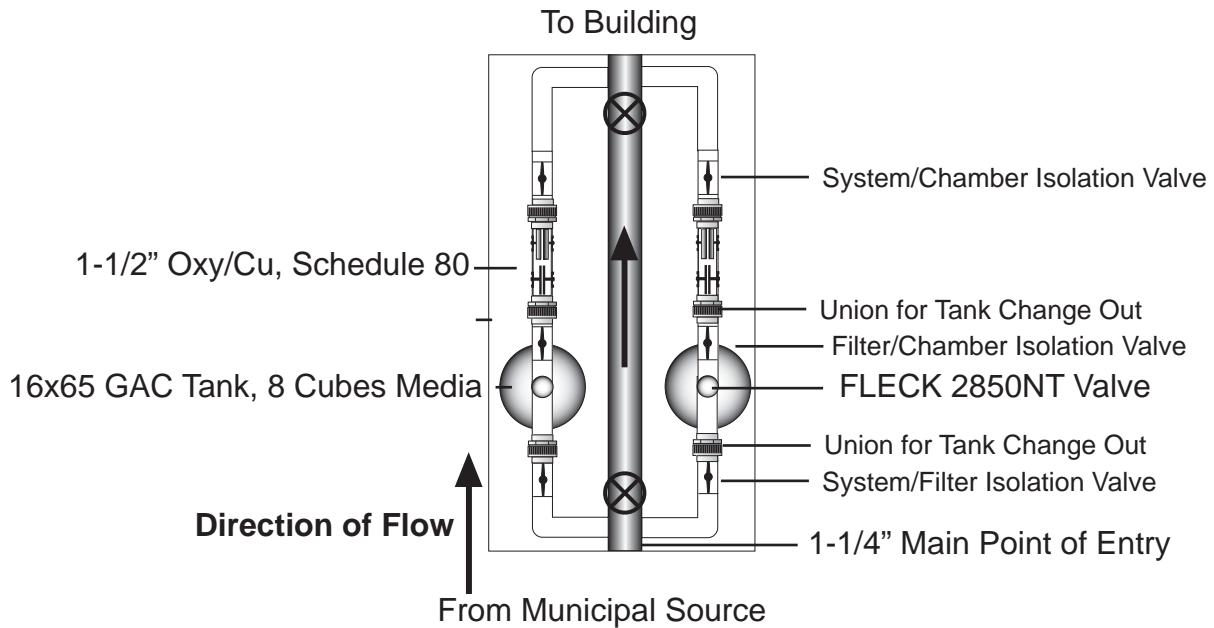

4" INLET, BYPASS IS STRAIGHT THROUGH
Two 1 ½" LINES IN PARALLEL
Two 16x65 GAC TANKS, 1 IN EACH SERIES
Two FLECK 2850NT VALVES
GATE VALVES ISOLATE Cu/Oxy CHAMBERS
TWO YEAR MEDIA CHANGE OUT, VALVE REBUILD KIT
ONE YEAR COPPER CHANGE OUT
MONTHLY Cu/Oxy CHAMBER CLEAN
DAILY COPPER TEST .1ppm TO .25ppm
VALVE TIMERS CONFIRMED
BOTH TANKS BACKWASH AT DIFFERENT TIMES
GAC FLOW CONTROL 12 DFCL
220v / 50Hz ECOsmarte CONTROLLERS
FLECK 2850NT VALVES, REBUILD KIT 3 year

SHIPS 4 PALLETS; 625lbs ON 3 PALLETS, 450lbs ON 4TH PALLET