




## QUAD CONFIGURATION FOR WELL WATER, OR IRRIGATION PARALLEL SYSTEMS IN SERIES RATED TO 60GPM: Two Views

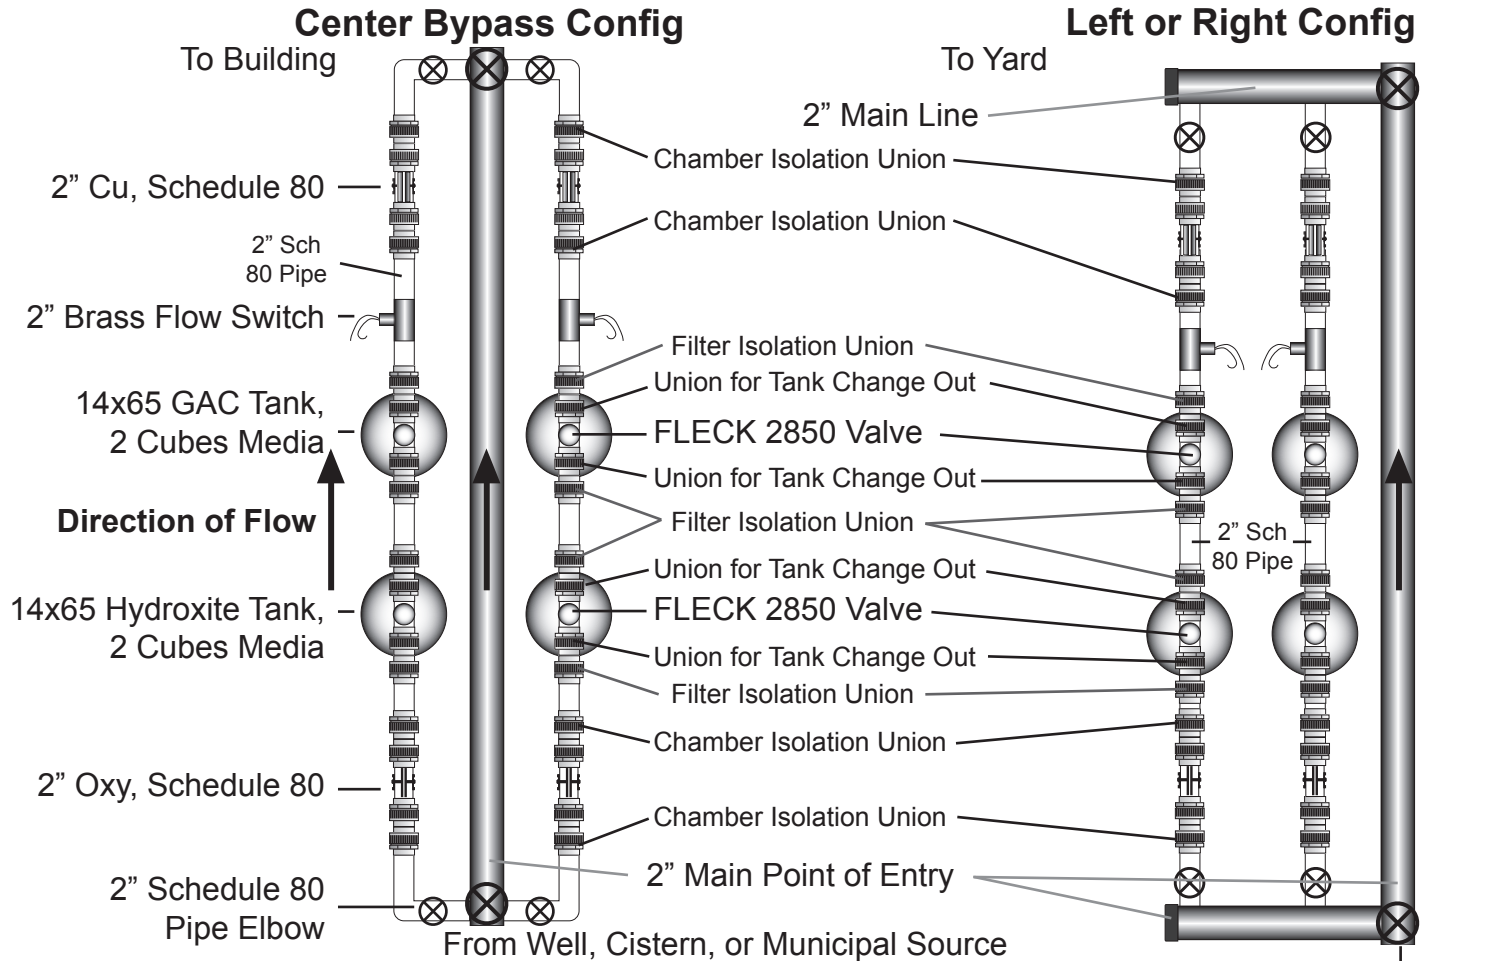

2" INLET, BYPASS IS STRAIGHT THROUGH  
 Two 2" LINES IN PARALLEL  
 Two 12x52 GAC AND HYDROXITE TANKS, 1 SET IN EACH SERIES  
 Two FLECK 2850 VALVES  
 GATE VALVES ISOLATE Cu/Oxy CHAMBERS  
 THREE YEAR MEDIA CHANGE OUT, VALVE REBUILD KIT  
 THREE YEAR COPPER CHANGE OUT  
 MONTHLY Cu/Oxy CHAMBER CLEAN  
 VALVE TIMERS CONFIRMED  
 ALL TANKS BACKWASH AT DIFFERENT TIMES  
 GAC FLOW CONTROL 7 DFCL  
 HYDROXITE FLOW CONTROL 12 DFCL  
 110v / 60Hz ECOsmarte CONTROLLERS  
 FLECK 2850 VALVES, REBUILD KIT 3RD YEAR

Flow restricted  
 at 21GPM to  
 keep sprinkler  
 heads in ground.

### LOGISTICS:

SHIPS 2 PALLETS - 600lbs ON EACH PALLET