


LIGHT COMMERCIAL w/ 1" INSTALL CONFIGURATION



PLANET FRIENDLY®

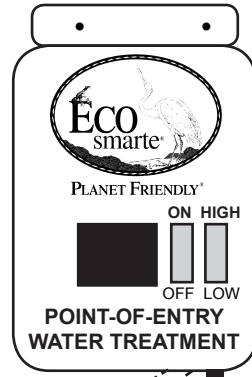


ECOsarte® Point-of-Entry
110V

Power Settings:

HIGH: Low TDS Waters
(below 500ppm)

LOW: Medium to High TDS Waters
(above 500 ppm)

To
Home

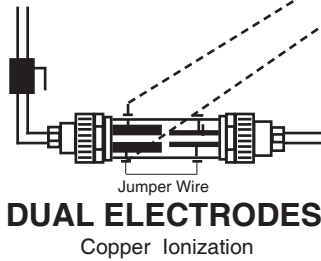

Titanium Oxidation
Natural Oxygen

Lights will circle on control box, indicating power to the electrodes, when faucet is opened.

**An Alternative
Science to
Water Softening
and
Reverse Osmosis...**

**2850
Control Head**

Rinse at 3000
gallons

½ to 1½ amp. fuse

Thicker wire to chamber,
thinner to valve. Both of
the thicker wires connect
to copper bars.

(Connect Relay Valve To
Control Box Connector)

(SET TO RINSE
ON PIN 6)

From City Line

Freeboard
(30% of Tank)

Granular Activated Carbon
(to be installed last, pre-measured
chemical removal media)

Hydroxite™
Measured Mineral Media
(optional - based on city water
source)

Sterile Pea Rock
Installs first, pre-measured.
Larger stones toward bottom.

